Bupa CareConnect

ICC2 CLINIC / RIYADH

Interior finishes

Material specifications
and room finish schedule

DESIGN DEVELOPMENT

22 November 2026



Contents

Interior finishes specifications

MATERIAL SECTIONS

01	Resilient flooring & carpet	4 finishes	07
02	Stone & porcelain	11 finishes	12
03	Paint & wall finishes	7 finishes	24
04	Glass, laminate & metal	3 finishes	32
05	Resin finishes	5 finishes	36
06	Ceilings	4 finishes	42
07	Skirting	13 finishes	47

INTERIOR VIEWS

Main lobby	03
Waiting area	04
Clinic	05
Nurse station	06

ROOM FINISH SCHEDULE

Basement 02	61
Basement 01	62
Ground floor	63
First floor	67
Roof level	71

Main lobby

Interior perspective



FINISH PALETTE



F-06

Natural marble



W-01

Band Stone paint



WC-2A-L

Natural oak HPL

Waiting area

Interior perspective




FINISH PALETTE



F-02A

Marble-look porcelain



HC-01

Healthcare vinyl wallcovering



C01A

Painted gypsum board

Clinic

Interior perspective



FINISH PALETTE

F-01A
Moon Dust 5403

W-01
Band Stone paint

G-02
Coloured feature glass

Nurse station

Interior perspective



FINISH PALETTE

F-01A
Moon Dust 5403

HC-01
Healthcare vinyl wallcovering

WC-2A-L
Natural oak HPL


Resilient flooring & carpet

Vinyl sheet and broadloom carpet

MATERIAL PALETTE




F-01A Moon Dust 5403

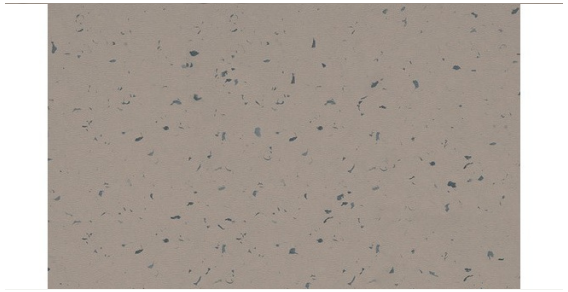

F-01B Wood Path 5443



F-05A Strata Carrara

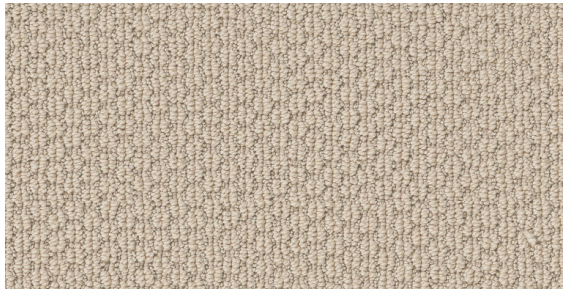

F-05B Statement Forward

FINISH INDEX

F-01A	Moon Dust 5403	**08**
F-01B	Wood Path 5443	**09**
F-05A	Strata Carrara	**10**
F-05B	Statement Forward	**11**

FLOOR FINISHES

Moon Dust 5403

FINISH CODE

F-01A



Specified product

Gerflor Mipolam Planet 5403, Moon Dust

Plan key



LOCATION

First floor

310 Shared Clinic

SCHEDULED APPLICATIONS

98 rooms / B02 · GF · L01 · RF

310 Shared Clinic · 003 Lobby · 209 Control

MATERIAL SPECIFICATION

Range	**Gerflor Mipolam Planet**
Reference	**5403 · Moon Dust**
Colour reference	**NCS 1002-Y50R**
Thickness / roll	**2 mm / 2 m wide**

DESCRIPTION


Homogeneous healthcare vinyl sheet with a light flecked surface.

FLOOR FINISHES

Wood Path 5443

FINISH CODE

F-01B

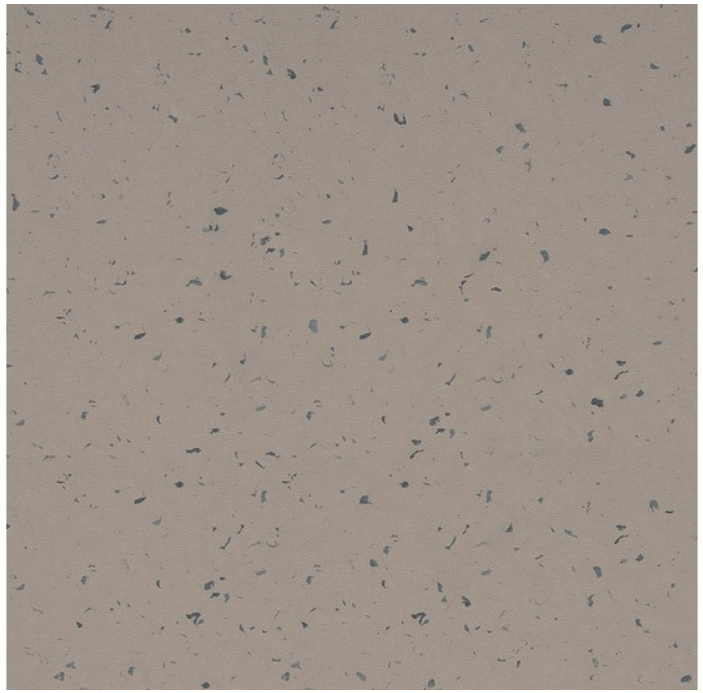

Specified product

Gerflor Mipolam Planet 5443, Wood Path

Plan key

MATERIAL SPECIFICATION

Range	**Gerflor Mipolam Planet**
Reference	**5443 · Wood Path**
Surface	**Wood-look homogeneous vinyl**
Thickness	**2 mm**

DESCRIPTION

Homogeneous healthcare vinyl sheet with a wood-look finish.



LOCATION

First floor

336 Bay

SCHEDULED APPLICATIONS

2 rooms / L01

336 Bay · 337 Bay

FLOOR FINISHES

Strata Carrara

FINISH CODE

F-05A



Specified product

Shaw Contract, Strata in Carrara 20100

Plan key

MATERIAL SPECIFICATION

Manufacturer	**Shaw**
Reference	**Strata Carrara · 20100**
Format	**Broadloom**
Thickness	**10.03 mm**

DESCRIPTION

Broadloom carpet specified for office and administrative areas.



LOCATION

Roof level

427 Director Office

SCHEDULED APPLICATIONS

7 rooms / GF · L01 · RF


427 Director Office · 212 Radiologist Office · 234 Accounting Office

FLOOR FINISHES

Statement Forward

FINISH CODE

F-05B

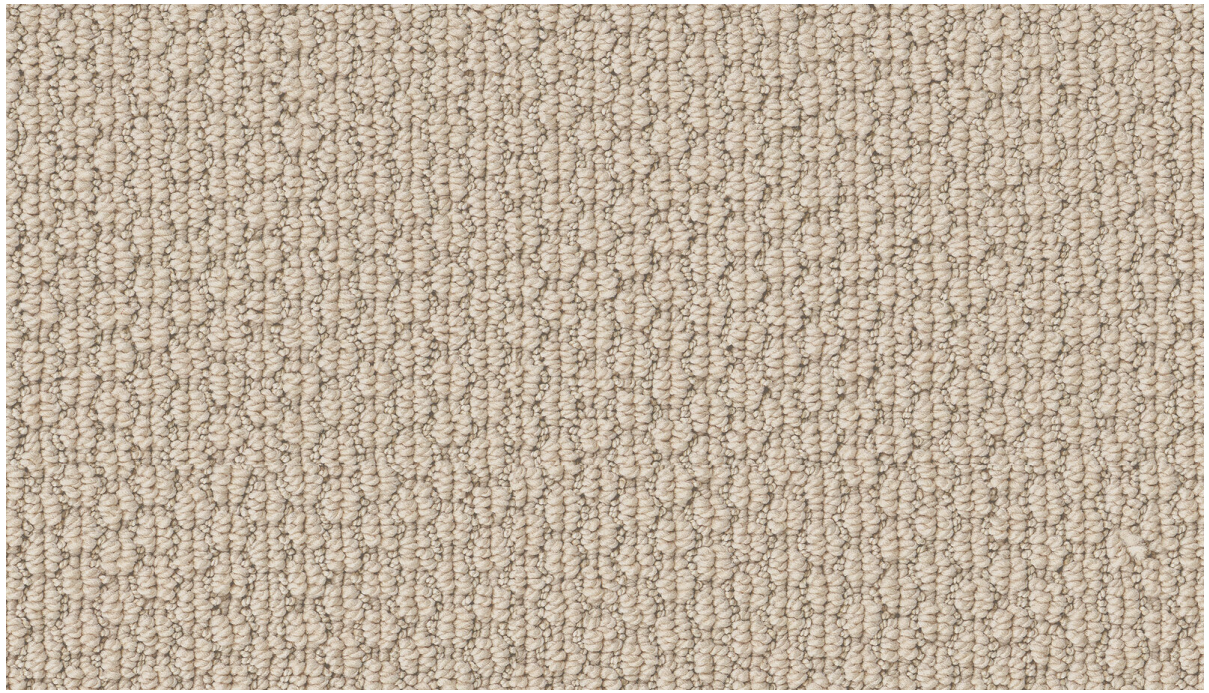

Plan key

Specified product

Shaw Contract, Statement in Forward 00102



LOCATION

Ground floor

226 Female Prayer

SCHEDULED APPLICATIONS

2 rooms / GF

226 Female Prayer · 228 Male Prayer

MATERIAL SPECIFICATION

Manufacturer	**Shaw**
Reference	**Statement Forward**
Format	**Broadloom**
Thickness	**8.59 mm**

DESCRIPTION

Broadloom carpet for the prayer rooms.

Stone & porcelain

Floor tiles, wall cladding and stair treads

MATERIAL PALETTE



F-06 Natural marble



F-02B Porcelain 10794



W-05A Ablution wall porcelain



F-02S Porcelain stair finish

FINISH INDEX

F-06	Natural marble	**13**
F-02A	Marble-look porcelain	**14**
F-02B	Porcelain 10794	**15**
F-02C	Textured porcelain	**16**
F-02D	Matt porcelain	**17**
F-02E	Grey porcelain	**18**
F-02S	Porcelain stair finish	**19**
W-05A	Ablution wall porcelain	**20**
W-05B	Service wall porcelain	**21**
WC-1C-M	Public and patient WC porcelain	**22**
WC-3A-CE	Staff WC porcelain	**23**

FLOOR FINISHES

Natural marble

FINISH CODE
F-06



Stone reference
Honed Tundra Gray marble, Tile & Mosaic Depot


Plan key

MATERIAL SPECIFICATION

Material	**Natural marble**
Colour	**Warm light grey**
Module	**1200 × 1200 mm**
Thickness	**20 mm**

DESCRIPTION

1200 × 1200 × 20 mm. Warm light grey natural marble.



LOCATION

Ground floor

201 Main Lobby

SCHEDULED APPLICATIONS

6 rooms / GF

201 Main Lobby · 202 Welcome Desk · 204 Cafe

FLOOR FINISHES

Marble-look porcelain

FINISH CODE
F-02A



Appearance reference
Atlas Concorde, Marvel Pro Grey Fleury

Plan key

MATERIAL SPECIFICATION

Material	**Marble-look porcelain**
Colour / surface	**Warm light grey / semi-polished**
Module	**1200 × 1200 mm**
Thickness	**10 mm**

DESCRIPTION

1200 × 1200 × 10 mm. Warm light grey, semi-polished surface.



LOCATION

First floor

301 Waiting Area

SCHEDULED APPLICATIONS

14 rooms / B01 · GF · L01 · RF

301 Waiting Area · 104 Receiving Unloading - Unboxing · 106 Lobby

FLOOR FINISHES

Porcelain 10794

FINISH CODE

F-02B



Plan key

Appearance reference

RAK Lounge porcelain. Supplier for 10794 unconfirmed.

MATERIAL SPECIFICATION

Material	**Porcelain**
Reference	**10794**
Module	**600 × 600 mm**
Surface	**Matt**

COMPANION FINISHES / ROOM 327

Ceiling	C02
Wall	WC-1C-M/W-01W/W-07
Skirting	S-02B



LOCATION

First floor

327 ADA Toilet

SCHEDULED APPLICATIONS


18 rooms / GF · L01 · RF

327 ADA Toilet · 214 Toilet · 219 Patient Toilet

FLOOR FINISHES

Textured porcelain

FINISH CODE
F-02C

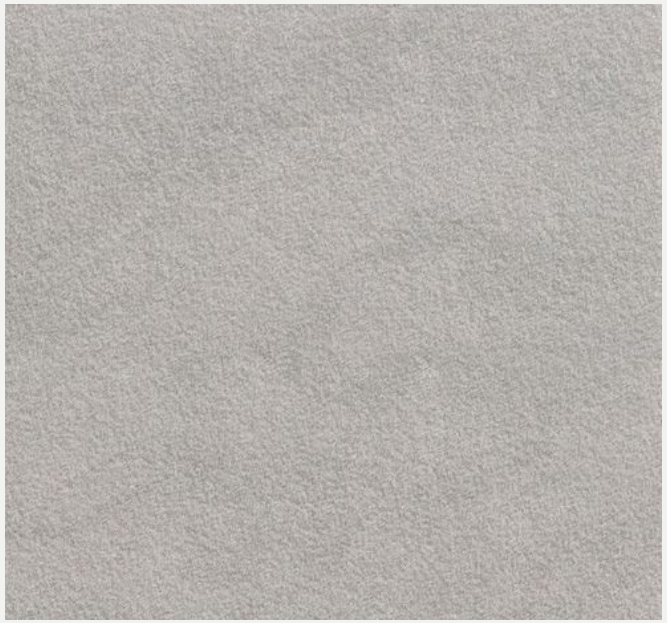

MODEL COLOUR

600 × 600 mm

Textured matt

MATERIAL SPECIFICATION

Material	**Porcelain**
Colour	**Light grey**
Module	**600 × 600 mm**
Surface	**Textured matt**

DESCRIPTION

600 × 600 mm. Light grey, textured matt surface.

Texture reference
RAKO Kaamos, textured matt porcelain

Plan key



LOCATION

Ground floor

227 Female Ablution

SCHEDULED APPLICATIONS

2 rooms / GF

227 Female Ablution · 229 Ablution

FLOOR FINISHES

Matt porcelain

FINISH CODE
F-02D



MODEL COLOUR

600 × 600 mm

11 mm thick · matt

MATERIAL SPECIFICATION

Material	**Porcelain**
Module	**600 × 600 mm**
Thickness	**11 mm**
Surface	**Matt**

DESCRIPTION

600 × 600 × 11 mm. Matt surface.

Appearance reference
RAK Lounge Beige porcelain, surface sample

Plan key



LOCATION

Ground floor

236 Male Staff Toilet

SCHEDULED APPLICATIONS

6 rooms / GF · L01 · RF

236 Male Staff Toilet · 237 Female Staff Toilet · 341 Staff Toilet

FLOOR FINISHES

Grey porcelain

FINISH CODE

F-02E



MODEL COLOUR

600 × 600 mm

Grey · matt

MATERIAL SPECIFICATION

Material	**Porcelain**
Colour	**Grey**
Module	**600 × 600 mm**
Surface	**Matt**

DESCRIPTION

600 × 600 mm. Grey, matt surface.

Appearance reference

Marazzi SistemN, mid-grey porcelain colour reference

Plan key



LOCATION

Ground floor

224 Janitor

SCHEDULED APPLICATIONS


3 rooms / GF · L01

224 Janitor · 235 Janitor · 358 Janitor

WALL FINISHES

Ablution wall porcelain

FINISH CODE
W-05A

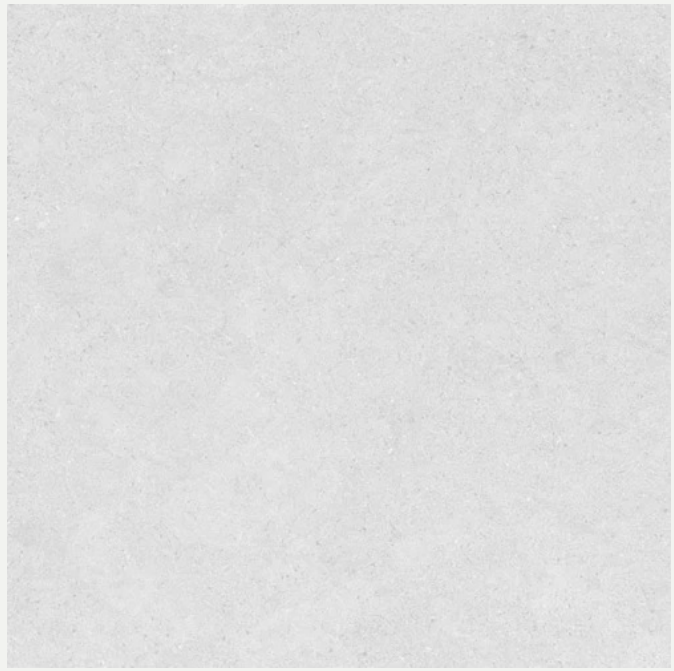

Appearance reference
Light-grey porcelain, Riyadh Ceramics

Plan key

MATERIAL SPECIFICATION

Material	**Porcelain**
Module	**600 × 600 mm**
Colour / surface	**Light grey / matt**
Position	**Lower wall cladding**

DESCRIPTION

600 × 600 mm light grey matt porcelain to lower walls.



LOCATION

Ground floor

227 Female Ablution

SCHEDULED APPLICATIONS


2 rooms / GF

227 Female Ablution · 229 Ablution

WALL FINISHES

Service wall porcelain

FINISH CODE
W-05B

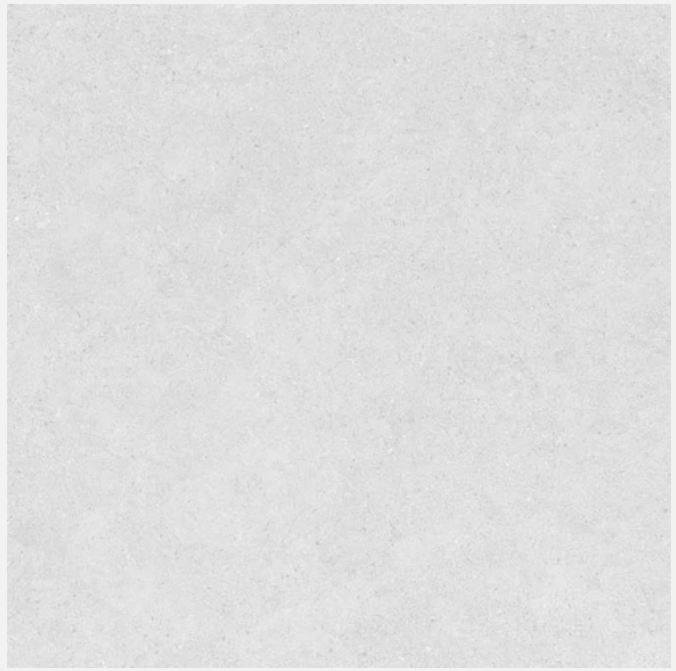

Appearance reference
Light-grey porcelain, Riyadh Ceramics


Plan key

MATERIAL SPECIFICATION

Material	**Porcelain**
Module	**600 × 600 mm**
Colour / surface	**Light grey / matt**
Position	**Sink splash zone**

DESCRIPTION

600 × 600 mm light grey matt porcelain to sink splash zones.



LOCATION

Basement 01

103 Store

SCHEDULED APPLICATIONS

24 rooms / B01 · GF · L01 · RF

103 Store · 105 Housekeeping - Janitor · 206 Cafe Store

WALL FINISHES

Public and patient WC porcelain

FINISH CODE

WC-1C-M



Appearance reference

RAK Lounge porcelain. Supplier for 10794 unconfirmed.

Plan key

MATERIAL SPECIFICATION

Material	**Porcelain**
Reference	**10794**
Module / surface	**1200 × 600 mm / matt**
Position	**Lower wall cladding**

DESCRIPTION

10794 porcelain, 1200 × 600 mm. Matt lower-wall cladding.



LOCATION

First floor

327 ADA Toilet

SCHEDULED APPLICATIONS

14 rooms / GF · L01 · RF

327 ADA Toilet · 220 Patient Toilet · 225 Female Public Toilets

WALL FINISHES

Staff WC porcelain

FINISH CODE

WC-3A-CE



Appearance reference

Marazzi Mystone Pietra di Vals, installed tile surface

MATERIAL SPECIFICATION

Material	**Porcelain**
Module / thickness	**1200 × 600 mm / 11 mm**
Surface	**Matt**
Position	**Full-height wall cladding**

DESCRIPTION

1200 × 600 × 11 mm. Matt, full-height wall cladding.

Plan key



LOCATION

Ground floor

236 Male Staff Toilet

SCHEDULED APPLICATIONS


6 rooms / GF · L01 · RF

236 Male Staff Toilet · 237 Female Staff Toilet · 341 Staff Toilet


Paint & wall finishes

Wall coatings, vinyl wallcovering and room finishes

MATERIAL PALETTE

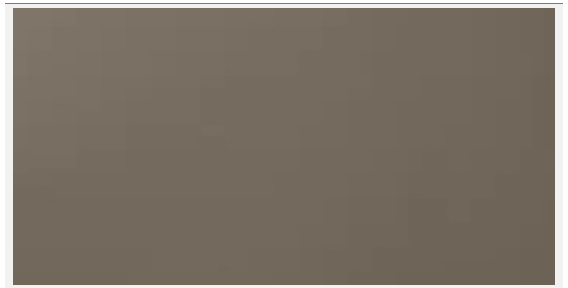

W-01 Band Stone paint

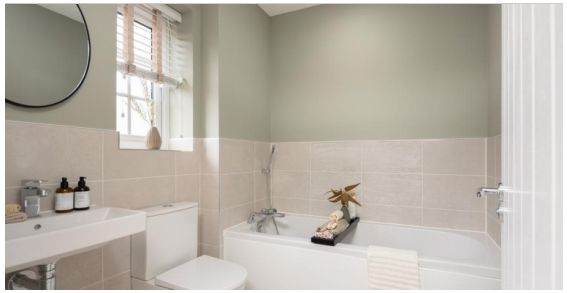

W-01W Moisture-resistant paint



HC-01 Healthcare vinyl wallcovering



WC-4A-P Jazz White 7236

FINISH INDEX

W-01	Band Stone paint	**25**
W-01W	Moisture-resistant paint	**26**
HC-01	Healthcare vinyl wallcovering	**27**
WC-4A-P	Jazz White 7236	**28**
WC-4B-P	Platinum 9911	**29**
WC-1C-W	Toilet wall finish	**30**
WC-4A-L	Retail and waiting wall finish	**31**

WALL FINISHES

Band Stone paint

FINISH CODE

W-01



Named colour

Jotun 1145 Band Stone on the right-hand wall


Plan key

MATERIAL SPECIFICATION

Material	**Acrylic healthcare paint**
Colour	**Band Stone**
Properties	**Washable and low VOC**
Position	**Main walls**

DESCRIPTION

Washable, low-VOC acrylic healthcare paint to main walls.



LOCATION

Ground floor

201 Main Lobby

SCHEDULED APPLICATIONS

83 rooms / GF · L01 · RF

201 Main Lobby · 204 Cafe · 205 Cafe Seating

WALL FINISHES

Moisture-resistant paint

FINISH CODE

W-01W



Plan key

Application reference


Painted upper wall above tile, Dandara

MATERIAL SPECIFICATION

Material	**Moisture-resistant paint**
Colour	**Warm neutral**
Surface	**Washable matt**
Position	**Upper walls above porcelain**

DESCRIPTION

Warm neutral, washable matt finish to the upper wall above porcelain cladding.



LOCATION

First floor

327 ADA Toilet

SCHEDULED APPLICATIONS

29 rooms / GF · L01 · RF


327 ADA Toilet · 214 Toilet · 219 Patient Toilet

WALL FINISHES

Healthcare vinyl wallcovering

FINISH CODE

HC-01

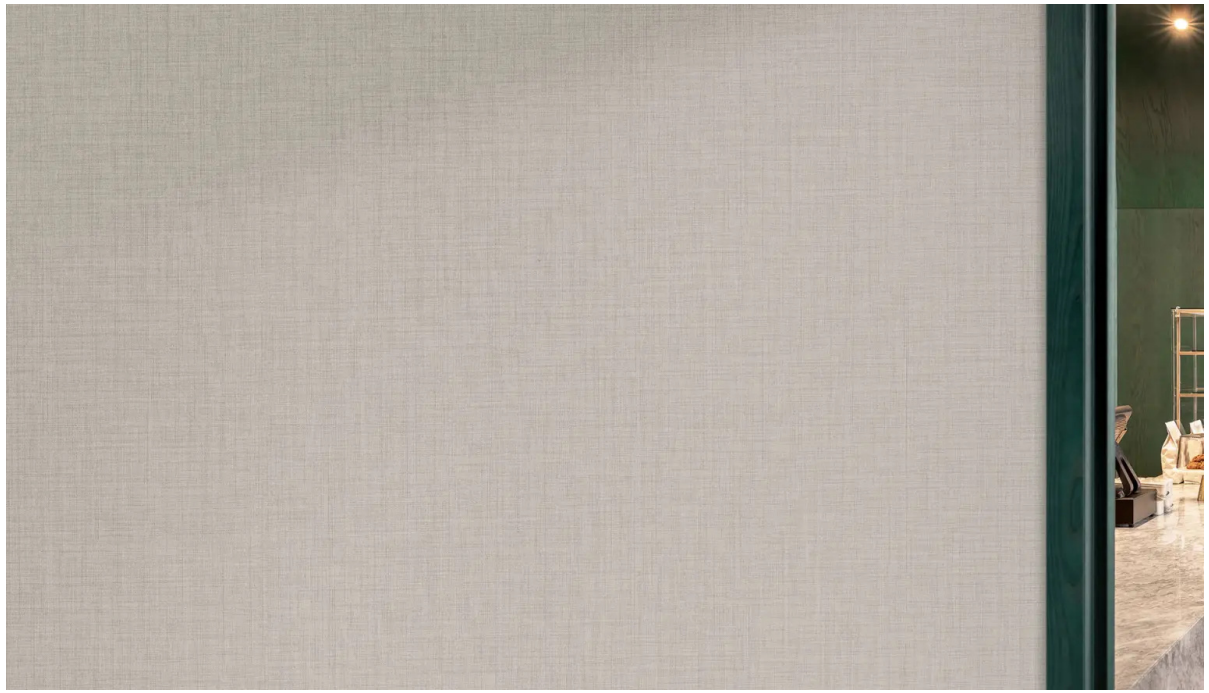

Material reference

Vescom Kilby+Protect vinyl wallcovering

Plan key

MATERIAL SPECIFICATION

Material	**Healthcare vinyl wallcovering**
Colour	**Light warm neutral**
Properties	**Cleanable and disinfectable**
Position	**Main walls**

DESCRIPTION

Cleanable and disinfectable main-wall finish in a light warm neutral colour.



LOCATION

First floor

301 Waiting Area

SCHEDULED APPLICATIONS

33 rooms / GF · L01 · RF

301 Waiting Area · 202 Welcome Desk · 212 Radiologist Office

WALL FINISHES

Jazz White 7236

FINISH CODE

WC-4A-P



Named colour

Jotun 7236 Jazz White on the right-hand wall


Plan key

MATERIAL SPECIFICATION

Material	**Washable wall paint**
Reference	**7236 · Jazz White**

COMPANION FINISHES / ROOM 01

Floor	F-02S
Ceiling	C04
Skirting	S-02S



LOCATION

Basement 02

01 Stair

SCHEDULED APPLICATIONS

26 rooms / B02 · B01 · GF · L01 · RF


01 Stair · 003 Lobby · 005 Diesel Tank

WALL FINISHES

Platinum 9911

FINISH CODE

WC-4B-P

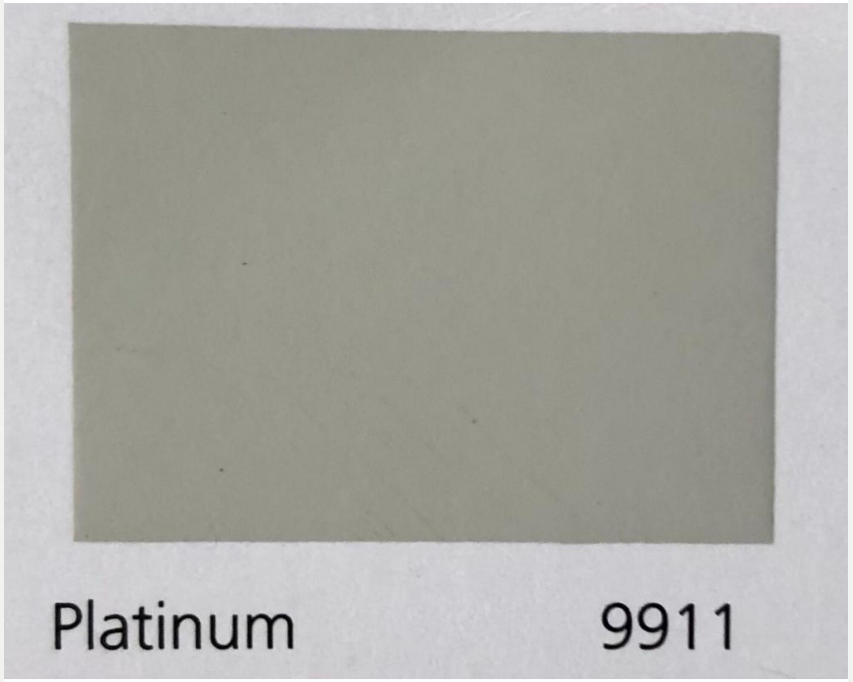

Named colour

Photographed Jotun 9911 Platinum colour card


Plan key

MATERIAL SPECIFICATION

Material	**Washable wall paint**
Reference	**9911 · Platinum**

COMPANION FINISHES / ROOM 006

Floor	F04A
Ceiling	C04
Skirting	S04A



LOCATION

Basement 02

006 Electrical Room

SCHEDULED APPLICATIONS

16 rooms / B02 · B01 · GF · L01 · RF

006 Electrical Room · 207 IT · 218 PACS

WALL FINISHES

Toilet wall finish

FINISH CODE

WC-1C-W



Ground floor · rooms using WC-1C-W

ROOM APPLICATION

Application	**Wall finish**
Room	**Toilet**
Room number	**214**
Level	**Ground floor**

COMPANION FINISHES / ROOM 214

Floor	F-02B
Ceiling	C02
Skirting	S-02B

LOCATION

Ground floor

214 Toilet

SCHEDULED APPLICATIONS

2 rooms / GF

214 Toilet · 219 Patient Toilet

Glass, laminate & metal

Feature panels and junction trim

MATERIAL PALETTE



G-02 Coloured feature glass



WC-2A-L Natural oak HPL



W-07 Metal junction trim

FINISH INDEX

G-02	Coloured feature glass	33
WC-2A-L	Natural oak HPL	34
W-07	Metal junction trim	35

WALL FINISHES

Coloured feature glass

FINISH CODE
G-02



Material reference
AGC Lacobel glass sample. Green Sage shown as an example.

Plan key

MATERIAL SPECIFICATION

Material	**Coloured glass**
Position	**Feature walls and display panels**

DESCRIPTION

Feature glass to selected wall and display panels.



LOCATION

First floor

310 Shared Clinic

SCHEDULED APPLICATIONS

53 rooms / GF · L01 · RF

310 Shared Clinic · 221 Waiting Area · 244 Retail and Waiting

WALL FINISHES

Natural oak HPL

FINISH CODE


WC-2A-L



Grain reference

EGGER Light Sorano Oak laminate, H1334 ST9

Plan key



LOCATION

Ground floor

201 Main Lobby

SCHEDULED APPLICATIONS

56 rooms / GF · L01 · RF

201 Main Lobby · 202 Welcome Desk · 204 Cafe

MATERIAL SPECIFICATION

Material	**High-pressure laminate**
Appearance	**Natural oak**
Grain	**Vertical**
Surface	**Low sheen**

DESCRIPTION

High-pressure laminate feature panel with vertical grain and a low-sheen finish.

WALL FINISHES

Metal junction trim

FINISH CODE
W-07



Profile reference
Schlüter-JOLLY brushed stainless steel edge

Plan key

MATERIAL SPECIFICATION

Material	**Metal trim**
Colour	**Stainless-steel colour finish**
Profile	**Slim junction trim**
Position	**Between porcelain and paint**

DESCRIPTION

Slim trim with a stainless-steel colour finish at the porcelain and paint junction.



LOCATION

First floor

327 ADA Toilet

SCHEDULED APPLICATIONS

29 rooms / GF · L01 · RF

327 ADA Toilet · 214 Toilet · 219 Patient Toilet


Resin finishes

Service floors, traffic coatings and tank finishes

MATERIAL PALETTE



F-04A Seamless epoxy resin

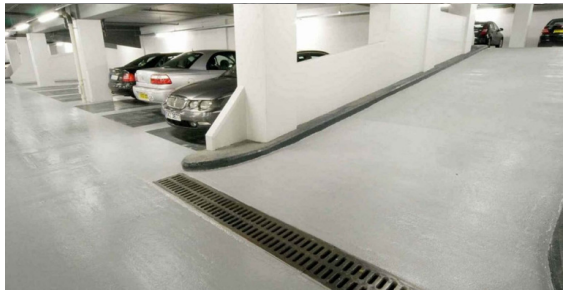

F-04B Traffic epoxy coating



W06 Epoxy wall finish



SP-01 Fire tank

FINISH INDEX

F-04A	Seamless epoxy resin	**37**
F-04B	Traffic epoxy coating	**38**
W06	Epoxy wall finish	**39**
SP-01	Fire tank	**40**
SP-02	Water tank	**41**

FLOOR FINISHES

Seamless epoxy resin

FINISH CODE
F-04A



Plan key


Application reference
Seamless grey epoxy floor, Top Team

MATERIAL SPECIFICATION

Material	**Epoxy resin**
Colour	**Light grey**
Surface	**Seamless**
Substrate	**Screed**

DESCRIPTION

Light grey epoxy resin flooring on screed.



LOCATION

Basement 01

101 Medical Waste

SCHEDULED APPLICATIONS


24 rooms / B02 · B01 · GF · L01 · RF

101 Medical Waste · 005 Diesel Tank · 006 Electrical Room

FLOOR FINISHES

Traffic epoxy coating

FINISH CODE
F-04B

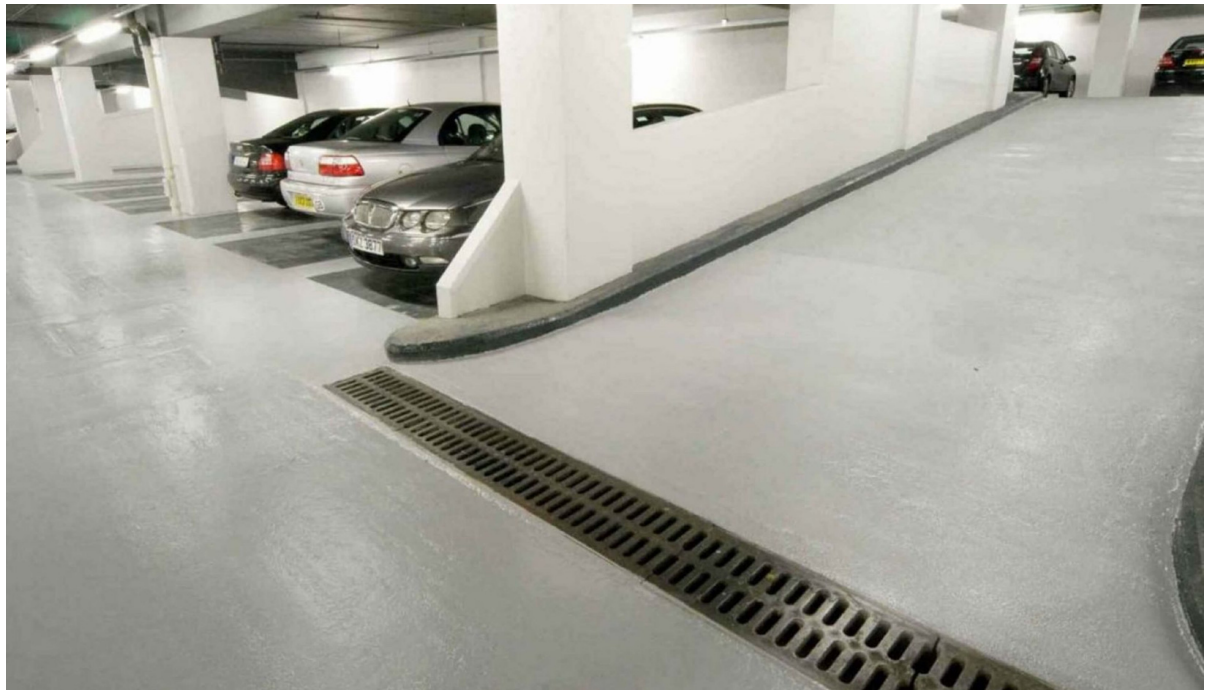

Application reference
Sika, The Lanes car park


Plan key

MATERIAL SPECIFICATION

Material	**Traffic epoxy coating**
Colour	**Grey**
Application	**Parking floors**

DESCRIPTION

Grey epoxy traffic coating to parking floors.



LOCATION

Basement 02

009 Parking-02

SCHEDULED APPLICATIONS

2 rooms / B02 · B01

009 Parking-02 · 114 Parking-01

WALL FINISHES

Epoxy wall finish

FINISH CODE
W06




MATERIAL SPECIFICATION

Material	**Epoxy wall finish**
Application	**Waste room walls**

DESCRIPTION

Epoxy finish to the medical waste and waste room walls.

Application reference
Stonhard Stonglaze, pharmaceutical corridor walls



LOCATION

Basement 01

101 Medical Waste

SCHEDULED APPLICATIONS

2 rooms / B01

101 Medical Waste · 102 Waste Room

SPECIAL FINISHES

Fire tank

FINISH CODE

SP-01



MATERIAL SPECIFICATION


Floor finish	**Epoxy on screed**
Scheduled surfaces	**Floor, walls and ceiling**

DESCRIPTION

Floor build-up with an epoxy finish on screed. The room finish code also applies to walls and ceiling.

Application reference

Sika reservoir interior. Tank finish appearance only.



LOCATION

Basement 02

001 Fire Tank

SCHEDULED APPLICATIONS

1 room / B02

001 Fire Tank

SPECIAL FINISHES

Water tank

FINISH CODE

SP-02



MATERIAL SPECIFICATION


Floor finish	**Epoxy on screed**
Scheduled surfaces	**Floor, walls and ceiling**

DESCRIPTION

Floor build-up with an epoxy finish on screed. The room finish code also applies to walls and ceiling.

Application reference

Gönhard drinking-water reservoir, BETOSAN



LOCATION

Basement 02

002 Water Tank

SCHEDULED APPLICATIONS

1 room / B02

002 Water Tank

Ceilings

Gypsum board, demountable panels and exposed soffits

MATERIAL PALETTE



C01A Painted gypsum board



C02 Moisture-resistant gypsum



C03 Demountable ceiling panels



C04 Painted exposed soffit

FINISH INDEX

C01A	Painted gypsum board	**43**
C02	Moisture-resistant gypsum	**44**
C03	Demountable ceiling panels	**45**
C04	Painted exposed soffit	**46**

CEILING FINISHES

Painted gypsum board

FINISH CODE
C01A



Plan key


MATERIAL SPECIFICATION

Material	**Painted gypsum board**
Colour	**RAL 9003 · white**
Surface	**Smooth**

DESCRIPTION

Smooth white finish, RAL 9003.

Application reference
Painted ceiling, Lindner / Bonn University Hospital



LOCATION

Ground floor

201 Main Lobby

SCHEDULED APPLICATIONS


108 rooms / B02 · B01 · GF · L01 · RF

201 Main Lobby · 003 Lobby · 202 Welcome Desk

CEILING FINISHES

Moisture-resistant gypsum

FINISH CODE
C02

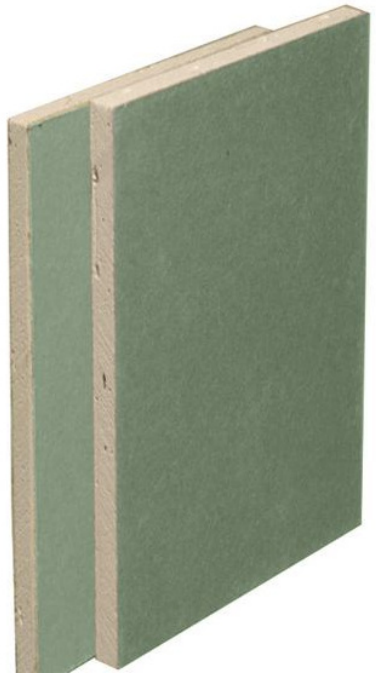

Plan key

MATERIAL SPECIFICATION

Material	**Moisture-resistant gypsum**
Colour	**White**
Surface	**Smooth and washable**

DESCRIPTION

Smooth, washable white finish.

Substrate reference
Gyproc moisture-resistant board before painting



LOCATION

First floor

327 ADA Toilet

SCHEDULED APPLICATIONS

31 rooms / GF · L01 · RF


327 ADA Toilet · 214 Toilet · 219 Patient Toilet

CEILING FINISHES

Demountable ceiling panels

FINISH CODE
C03



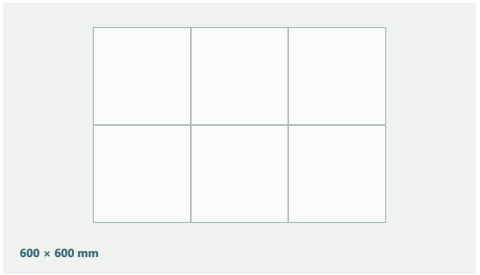

Panel module

MATERIAL SPECIFICATION

Material	**Demountable ceiling panels**
Module	**600 × 600 mm**
Colour	**White**

COMPANION FINISHES / ROOM 207

Floor	F04A
Wall	WC-4B-P
Skirting	S04A

Application reference
Rockfon MediCare, installed ceiling grid

Plan key



LOCATION

Ground floor

207 IT

SCHEDULED APPLICATIONS

24 rooms / GF · L01 · RF

207 IT · 213 Clean Utility · 216 Dirty Utility

CEILING FINISHES

Painted exposed soffit

FINISH CODE
C04



Application reference
Exposed soffit, The Terrace / AHM Architekten


Plan key

MATERIAL SPECIFICATION

Material	**Plaster and paint**
Substrate	**Exposed soffit**
Colour	**White**

DESCRIPTION

Plaster and white paint to the exposed soffit.



LOCATION

Basement 01

101 Medical Waste

SCHEDULED APPLICATIONS


23 rooms / B02 · B01 · GF · L01

101 Medical Waste · 01 Stair · 005 Diesel Tank

Skirting

Perimeter finishes and room applications

MATERIAL PALETTE

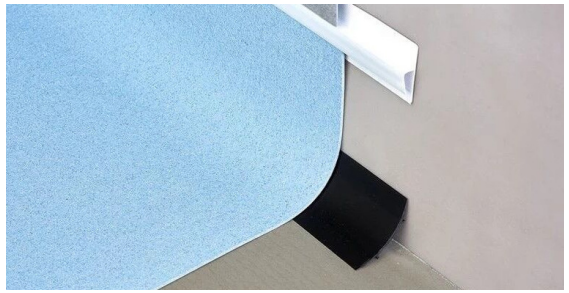

S-01A Coved vinyl skirting



S-02B Porcelain skirting



S-05C Timber skirting



S06 Marble skirting


FINISH INDEX


S-01A	Coved vinyl skirting	**48**
S-01B	Dark beige vinyl skirting	**49**
S-02A	Marble-look porcelain skirting	**50**
S-02B	Porcelain skirting	**51**
S-02C	Ablution skirting	**52**
S-02D	Staff toilet skirting	**53**
S-02E	Janitor room skirting	**54**
S-02S	Stair skirting	**55**
S-04A	Service and lobby skirting	**56**
S04B	Parking skirting	**57**
S-05A	Director's office skirting	**58**
S-05C	Timber skirting	**59**
S06	Marble skirting	**60**

SKIRTING

Coved vinyl skirting

FINISH CODE
S-01A

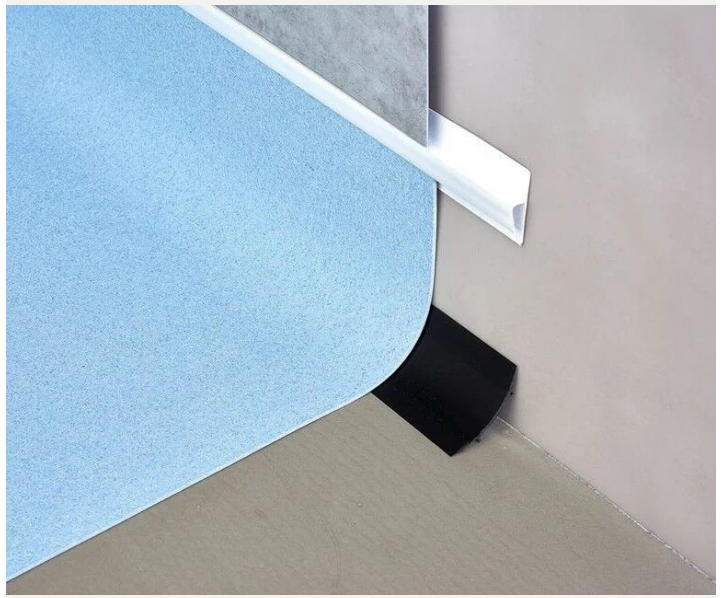

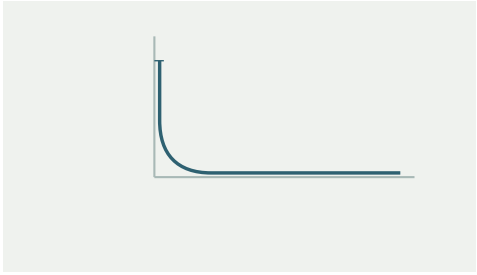

Cove profile

MATERIAL SPECIFICATION

Material	**Vinyl skirting**
Profile	**Coved, with former and cap**

DESCRIPTION

Vinyl perimeter skirting with a cove former and cap.

Profile reference
Polyflor Ejecta, cove former and capping detail

Plan key



LOCATION

First floor

310 Shared Clinic

SCHEDULED APPLICATIONS


98 rooms / B02 · GF · L01 · RF

310 Shared Clinic · 003 Lobby · 209 Control

SKIRTING

Dark beige vinyl skirting

FINISH CODE
S-01B

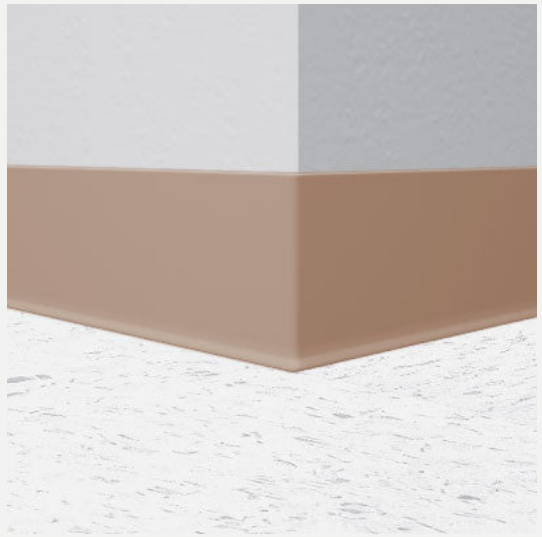



First floor / room locations

MATERIAL SPECIFICATION

Material	**Standard vinyl skirting**
Colour	**Dark beige**

DESCRIPTION

Standard dark beige vinyl skirting to the first-floor bays.

Colour and profile reference
Flexco Cappucino vinyl wall base



LOCATION

First floor

336 Bay

SCHEDULED APPLICATIONS

2 rooms / L01


336 Bay · 337 Bay

SKIRTING

Marble-look porcelain skirting

FINISH CODE
S-02A



Plan key 

Profile reference
Light-grey marble-look tile skirting, Leroy Merlin

MATERIAL SPECIFICATION

Material	**Marble-look porcelain**
Position	**Perimeter skirting**

DESCRIPTION

Marble-look porcelain perimeter skirting.



LOCATION

First floor

301 Waiting Area

SCHEDULED APPLICATIONS

11 rooms / GF · L01 · RF

301 Waiting Area · 206 Cafe Store · 232 Female Staff Lounge


SKIRTING

Porcelain skirting

FINISH CODE

S-02B





Scheduled skirting module

MATERIAL SPECIFICATION

Material	**Porcelain**
Height	**100 mm**
Width	**600 mm**

COMPANION FINISHES / ROOM 327

Floor	F-02B
Ceiling	C02
Wall	WC-1C-M/W-01W/W-07

Profile reference

Matt porcelain skirting, Betonstyle Grau

Plan key



LOCATION

First floor

327 ADA Toilet

SCHEDULED APPLICATIONS

18 rooms / GF · L01 · RF

327 ADA Toilet · 214 Toilet · 219 Patient Toilet

SKIRTING

Ablution skirting

FINISH CODE
S-02C



Ground floor · rooms using S-02C

ROOM APPLICATION

Application	**Perimeter skirting**
Room	**Female Ablution**
Room number	**227**
Level	**Ground floor**

COMPANION FINISHES / ROOM 227

Floor	F-02C
Ceiling	C02
Wall	W-05A/W-01W/W-07



LOCATION

Ground floor

227 Female Ablution

SCHEDULED APPLICATIONS

2 rooms / GF

227 Female Ablution · 229 Ablution

SKIRTING

Staff toilet skirting

FINISH CODE
S-02D



Ground floor · rooms using S-02D

ROOM APPLICATION

Application	**Perimeter skirting**
Room	**Male Staff Toilet**
Room number	**236**
Level	**Ground floor**

COMPANION FINISHES / ROOM 236

Floor	F-02D
Ceiling	C02
Wall	WC-3A-CE

LOCATION

Ground floor

236 Male Staff Toilet

SCHEDULED APPLICATIONS


6 rooms / GF · L01 · RF

236 Male Staff Toilet · 237 Female Staff Toilet · 341 Staff Toilet

SKIRTING

Janitor room skirting

FINISH CODE
S-02E

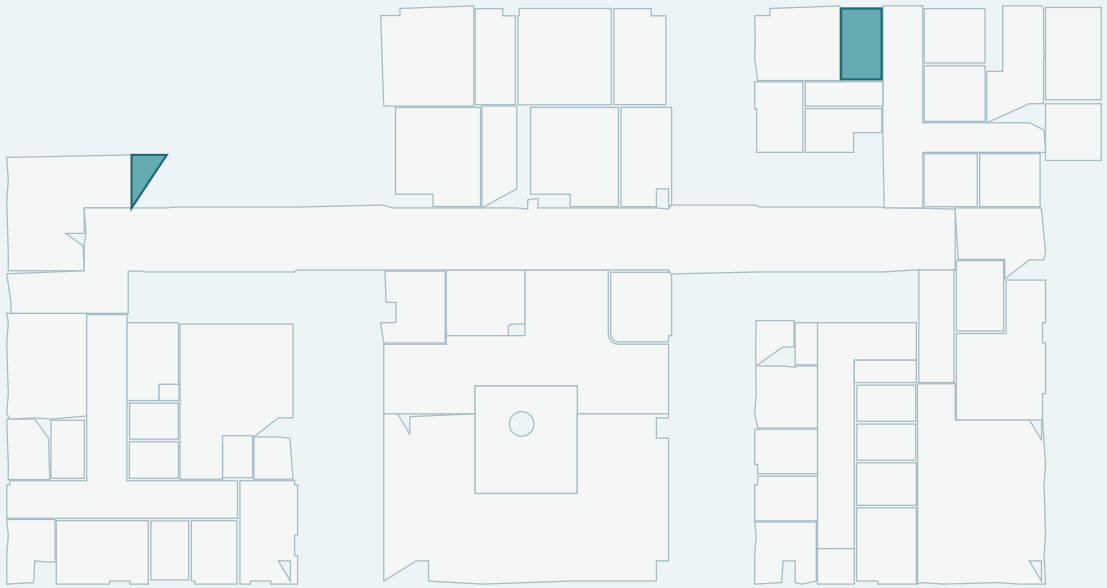

Ground floor · rooms using S-02E

ROOM APPLICATION

Application	**Perimeter skirting**
Room	**Janitor**
Room number	**224**
Level	**Ground floor**

COMPANION FINISHES / ROOM 224

Floor	F-02E
Ceiling	C02
Wall	W-05B



LOCATION

Ground floor

224 Janitor

SCHEDULED APPLICATIONS

3 rooms / GF · L01


224 Janitor · 235 Janitor · 358 Janitor

SKIRTING

Stair skirting

FINISH CODE

S-02S

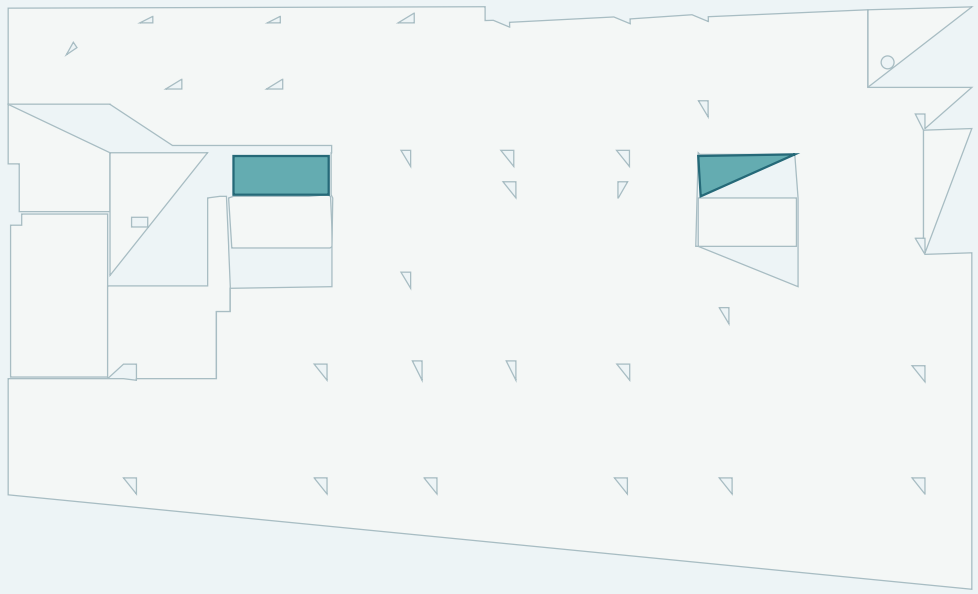

Basement 02 · rooms using S-02S

ROOM APPLICATION

Application	**Perimeter skirting**
Room	**Stair**
Room number	**01**
Level	**Basement 02**

COMPANION FINISHES / ROOM 01

Floor	F-02S
Ceiling	C04
Wall	WC-4A-P

LOCATION

Basement 02

01 Stair

SCHEDULED APPLICATIONS

2 rooms / B02


01 Stair · 02 Stair

SKIRTING

Service and lobby skirting

FINISH CODE

S-04A

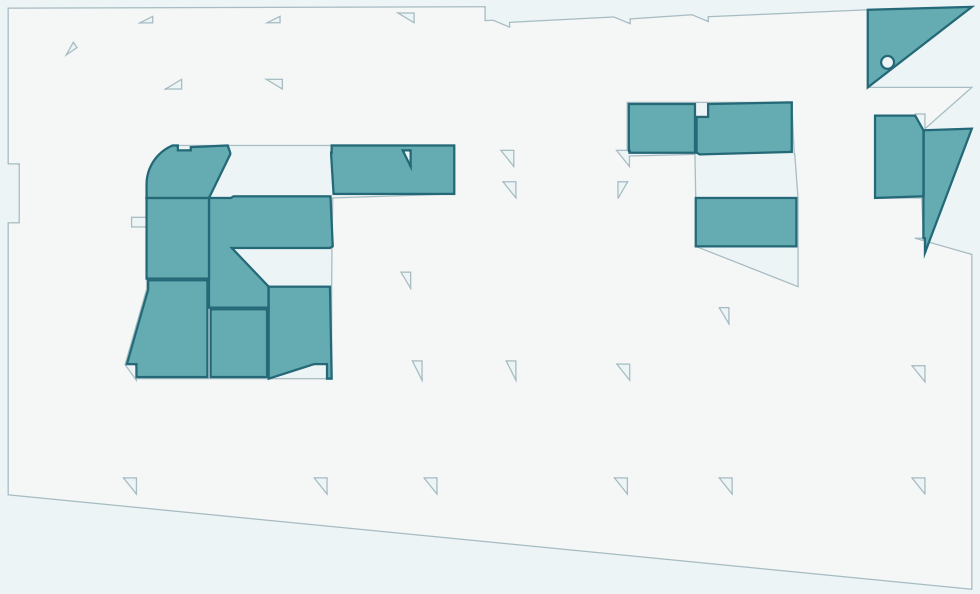

Basement 01 · rooms using S-04A

ROOM APPLICATION

Application	**Perimeter skirting**
Room	**Medical Waste**
Room number	**101**
Level	**Basement 01**

COMPANION FINISHES / ROOM 101

Floor	F04A
Ceiling	C04
Wall	W06



LOCATION

Basement 01

101 Medical Waste

SCHEDULED APPLICATIONS


28 rooms / B02 · B01 · GF · L01 · RF

101 Medical Waste · 005 Diesel Tank · 006 Electrical Room

SKIRTING

Parking skirting

FINISH CODE
S04B

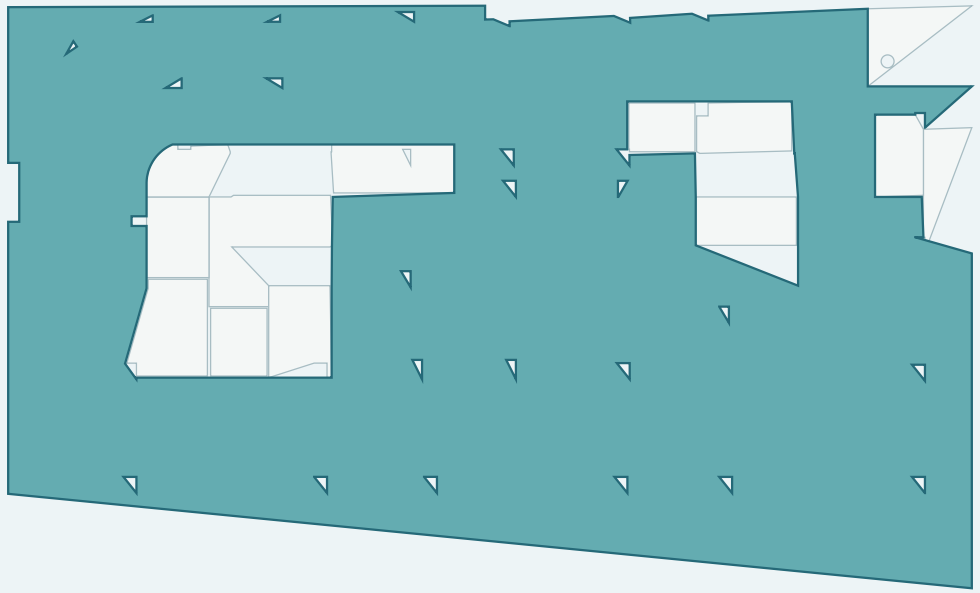


Basement 01 · rooms using S04B

ROOM APPLICATION

Application	**Perimeter skirting**
Room	**Parking-01**
Room number	**114**
Level	**Basement 01**

COMPANION FINISHES / ROOM 114

Floor	F04B
Ceiling	C04
Wall	WC-4A-P



LOCATION

Basement 01

114 Parking-01

SCHEDULED APPLICATIONS


1 room / B01

114 Parking-01

SKIRTING

Director’s office skirting

FINISH CODE
S-05A

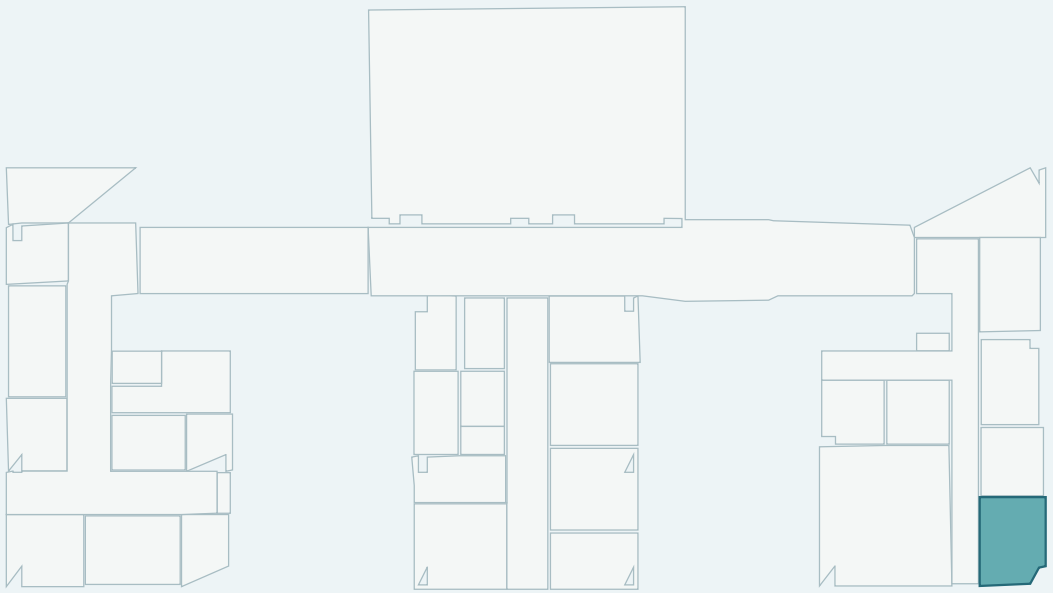

Roof level · rooms using S-05A

ROOM APPLICATION

Application	**Perimeter skirting**
Room	**Director Office**
Room number	**427**
Level	**Roof level**

COMPANION FINISHES / ROOM 427

Floor	F-05A
Ceiling	C01A
Wall	W-01/HC-01



LOCATION

Roof level

427 Director Office

SCHEDULED APPLICATIONS

1 room / RF

427 Director Office

SKIRTING

Timber skirting

FINISH CODE

S-05C



MATERIAL SPECIFICATION

Material	**Timber**
Position	**Floor-to-wall junction**

DESCRIPTION

Wooden skirting at the floor-to-wall junction.

Application reference

Square-edge oak skirting, Skirting 4 U

Plan key



LOCATION

Ground floor

212 Radiologist Office

SCHEDULED APPLICATIONS

8 rooms / GF · L01 · RF

212 Radiologist Office · 226 Female Prayer · 228 Male Prayer

SKIRTING

Marble skirting

FINISH CODE

S06



MATERIAL SPECIFICATION


Material	**Marble**
Position	**Perimeter skirting**

DESCRIPTION

Marble skirting to the ground-floor lobby and associated spaces.

Profile reference

Allure Light, honed marble skirting, Find Surfaces



LOCATION

Ground floor

201 Main Lobby

SCHEDULED APPLICATIONS

6 rooms / GF

201 Main Lobby · 202 Welcome Desk · 204 Cafe

Basement 02

Room schedule / 1 of 1

ROOM	NAME	FLOOR	CEILING	WALL	SKIRTING
01	Stair	F-02S	C04	WC-4A-P	S-02S
001	Fire Tank	SP-01	SP-01	SP-01	—
02	Stair	F-02S	C04	WC-4A-P	S-02S
002	Water Tank	SP-02	SP-02	SP-02	—
003	Lobby	F-01A	C01A	WC-4A-P	S-01A
004	Lobby	F-01A	C01A	WC-4A-P	S-01A
005	Diesel Tank	F04A	C04	WC-4A-P	S04A
006	Electrical Room	F04A	C04	WC-4B-P	S04A
007	Water Treatment Pump Room	F04A	C04	WC-4A-P	S04A
008	Pump Room	F04A	C04	WC-4A-P	S04A
009	Parking-02	F04B	C04	WC-4A-P	S04A

Basement 01

Room schedule / 1 of 1

ROOM	NAME	FLOOR	CEILING	WALL	SKIRTING
101	Medical Waste	F04A	C04	W06	S04A
102	Waste Room	F04A	C04	W06	S04A
103	Store	F04A	C04	W-05B	S04A
104	Receiving Unloading - Unboxing	F02A	C04	WC-4A-P	S04A
105	Housekeeping - Janitor	F04A	C04	W05B / WC-4A-P	S04A
106	Lobby	F02A	C01A	WC-4A-P	S04A
107	Medical Workshop	F04A	C04	WC-4A-P	S04A
108	MEDICAL GAS ROOM	F04A	C04	WC-4A-P	S04A
109	Compressed Air & Vacuum Plant Room	F04A	C04	WC-4A-P	S04A
110	Lobby	F02A	C01A	WC-4A-P	S04A
111	Generator Room	F04A	C04	WC-4A-P	S04A
112	UPS	F04A	C04	WC-4A-P	S04A
113	Electrical Room	F04A	C04	WC-4B-P	S04A
114	Parking-01	F04B	C04	WC-4A-P	S04B

Ground floor

Room schedule / 1 of 4

ROOM	NAME	FLOOR	CEILING	WALL	SKIRTING
201	Main Lobby	F06	C01A	W-01 / WC-2A-L	S06
202	Welcome Desk	F06	C01A	HC-01 / WC-2A-L	S06
204	Cafe	F06	C01A	W-01 / WC-2A-L	S06
205	Cafe Seating	F06	C01A	W-01 / WC-2A-L	S06
206	Cafe Store	F-02A	C01A	W-05B	S-02A
207	IT	F04A	C03	WC-4B-P	S04A
208	Corridor	F06	C01A	W-01	S06
209	Control	F-01A	C01A	W-01	S-01A
210	X-ray	F-01A	C01A	W-01	S-01A
211	Changing Room	F-01A	C01A	W-05B	S-01A
212	Radiologist Office	F-05A	C01A	HC-01 / W-01	S-05C
213	Clean Utility	F-01A	C03	W-05B	S-01A
214	Toilet	F-02B	C02	W-01W / WC-1C-W / W-07	S-02B
215	Ultrasound	F-01A	C01A	W-01	S-01A
216	Dirty Utility	F-01A	C03	W-05B	S-01A
217	Corridor	F-01A	C01A	W-01	S-01A

Ground floor

Room schedule / 2 of 4

ROOM	NAME	FLOOR	CEILING	WALL	SKIRTING
218	PACS	F-01A	C03	WC-4B-P	S-01A
219	Patient Toilet	F-02B	C02	W-01W / WC-1C-W / W-07	S-02B
220	Patient Toilet	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
221	Waiting Area	F-01A	C01A	HC-01 / W-01 / G-02 / WC-2A-L	S-01A
222	Crash Cart Bay	F-01A	C01A	W-01	S-01A
223	Security Control / MEP	F-04A	C03	WC-4B-P	S-04A
224	Janitor	F-02E	C02	W-05B	S-02E
225	Female Public Toilets	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
226	Female Prayer	F05B	C02	WC-4A-P	S05C
227	Female Ablution	F-02C	C02	W-05A / W-01W / W-07	S-02C
228	Male Prayer	F05B	C02	WC-4A-P	S05C
229	Ablution	F-02C	C02	W-05A / W-01W / W-07	S-02C
230	Male Public Toilets	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
231	Reception	F-01A	C01A	HC-01 / W-01 / WC-2A-L	S-01A
232	Female Staff Lounge	F-02A	C01A	WC-4A-P	S-02A
233	Male Staff Lounge	F-02A	C01A	WC-4A-P	S-02A

Ground floor

Room schedule / 3 of 4

ROOM	NAME	FLOOR	CEILING	WALL	SKIRTING
234	Accounting Office	F05A	C01A	W-01 / HC-01	S05C
235	Janitor	F-02E	C02	W-05B	S-02E
236	Male Staff Toilet	F-02D	C02	WC-3A-CE	S-02D
237	Female Staff Toilet	F-02D	C02	WC-3A-CE	S-02D
238	Store	F-01A	C04	W-05B	S-01A
239	Medical Records	F-01A	C01A	WC-4B-P	S-01A
240	Electricity Room	F04A	C03	WC-4B-P	S04A
241	Office	F05A	C01A	W-01 / HC-01	S05C
242	Store	F-01A	C04	W-05B	S-01A
243	Dispensing	F-01A	C01A	W-05B	S-01A
244	Retail and Waiting	F-02A	C01A	HC-01 / W-01 / G-02 / WC-4A-L	S-02A
245	Specimen Sorting	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
246	Clean Utility	F-01A	C03	W-05B	S-01A
247	Male Phleb	F-01A	C01A	W-01 / HC-01	S-01A
248	Dirty Utility	F-01A	C03	W-05B	S-01A
249	Female Phleb	F-01A	C01A	W-01 / HC-01	S-01A

Ground floor

Room schedule / 4 of 4

ROOM	NAME	FLOOR	CEILING	WALL	SKIRTING
250	Female Patient Toilet	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
251	Corridor	F-01A	C01A	W-01	S-01A
252	Male Patient Toilet	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
253	Nourishment	F-01A	C01A	WC-4B-P	S-01A
254	Dispatch Area	F-01A	C01A	WC-4B-P	S-01A
255	Secondary Waiting Area	F-01A	C01A	HC-01 / G-02 / WC-2A-L	S-01A
256	Secondary Waiting Area	F-01A	C01A	HC-01 / G-02 / WC-2A-L	S-01A
257	Reception	F-01A	C01A	HC-01 / G-02 / WC-2A-L	S-01A
258	Lobby	F-02B	C02	W-01 / W-01W / W-07	S-02B
259	Lobby	F-02B	C02	W-01 / W-01W / W-07	S-02B
260	Lobby	F-01A	C01A	W-01 / W-01W / W-07	S-01A
261	Lobby	F-01A	C01A	W-01 / W-01W / W-07	S-01A
262	Lobby	F06	C01A	W-01 / W-01W / W-07	S06
263	Unit S/S	F04A	C03	WC-4B-P	S04A
264	Meter Room	F04A	C03	WC-4B-P	S04A
268	Store	F01A	C04	G-02 / WC-4A-P	S01A

First floor

ROOM	NAME	FLOOR	CEILING	WALL	SKIRTING
301	Waiting Area	F-02A	C01A	HC-01 / WC-2A-L	S-02A
302	Vital Sign	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
303	Vital Sign	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
304	Patient Experience Office	F05A	C01A	W-01 / HC-01	S05C
305	Vital Sign	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
306	Electricity Room	F04A	C03	WC-4B-P	S04A
307	IT	F04A	C03	WC-4B-P	S04A
308	Corridor	F-02A	C01A	W-01	S-02A
309	Nurse Station	F-01A	C01A	HC-01 / W-01 / WC-2A-L / G-02	S-01A
310	Shared Clinic	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
311	Shared Clinic	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
312	Shared Clinic	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
313	Shared Clinic	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
314	Shared Clinic	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
315	Store-Equip	F-01A	C03	W-05B	S-01A

First floor

Room schedule / 2 of 4

ROOM	NAME	FLOOR	CEILING	WALL	SKIRTING
316	Clean Utility / Medication Room	F-01A	C03	W-05B	S-01A
317	Shared Clinic	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
318	Lobby	F-01A	C01A	W-01 / W-01W / W-07	S-01A
319	Shared Clinic	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
320	Pulmonary Studies	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
321	Shared Clinic	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
322	Treatment Room	F-01A	C01A	W-01 / HC-01	S-01A
323	Echo Room	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
324	Cardiac Stress Room	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
325	Cardiovascular Studies	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
326	General Store	F-01A	C04	W-05B	S-01A
327	ADA Toilet	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
328	Female Public toilet	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
329	Male Public toilet	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
330	Server Room	F-04A	C03	WC-4B-P	S-04A
331	Clean Utility	F-01A	C03	W-05B	S-01A

First floor

ROOM	NAME	FLOOR	CEILING	WALL	SKIRTING
332	Dirty Utility	F-01A	C03	W-05B	S-01A
333	Nurse Station	F-01A	C01A	HC-01 / WC-2A-L / W-01 / G-02	S-01A
334	Patient Toilet	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
335	Lobby	F-01A	C01A	W-01 / W-01W / W-07	S-01A
336	Bay	F-01B	C01A	W-01 / G-02 / HC-01	S-01B
337	Bay	F-01B	C01A	W-01 / G-02 / HC-01	S-01B
338	Patient Toilet	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
339	Corridor	F-02A	C01A	W-01	S-02A
340	ADA Toilet	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
341	Staff Toilet	F-02D	C02	WC-3A-CE	S-02D
342	Staff Toilet	F-02D	C02	WC-3A-CE	S-02D
343	Optha Room	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
344	Optha Room	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
345	Vision Test Room	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
346	Vision Screening Room	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
347	Staff Lounge	F-02A	C01A	WC-4A-P	S-02A

First floor

Room schedule / 4 of 4

ROOM	NAME	FLOOR	CEILING	WALL	SKIRTING
348	Injection Room	F-01A	C01A	W-01 / HC-01	S-01A
349	Chronic - 8	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
350	Chronic - 7	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
351	Chronic - 6	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
352	Chronic - 5	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
353	Chronic - 4	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
354	Chronic - 3	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
355	Chronic - 2	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
356	Chronic - 1	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
357	Dirty Utility	F-01A	C03	W-05B	S-01A
358	Janitor	F-02E	C02	W-05B	S-02E
359	Crash Cart Bay	F-01A	C01A	HC-01 / W-01	S-01A
360	Reception	F-01A	C01A	HC-01 / WC-2A-L	S-01A
362	Nurse Station	F-01A	C01A	HC-01 / WC-2A-L / G02	S-01A
363	Crash Cart Bay	F-01A	C01A	HC-01 / W-01	S-01A
364	Lobby	F-01A	C01A	W-01 / W-01W / W-07	S-01A

Roof level

ROOM	NAME	FLOOR	CEILING	WALL	SKIRTING
269	Corridor	—	—	—	—
401	Reception and Waiting Area	F-01A	C01A	HC-01 / G-02 / WC-2A-L	S-01A
402	Vital Sign Room	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
403	Admin Workstation	F05A	C01A	W-01 / HC-01	S05C
404	Clinic	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
405	Clean Area & Storage	F-01A	C03	W-05B	S-01A
406	Disinfection Area	F-01A	C03	W-05B	S-01A
407	Clinic	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
408	Toilet	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
409	Toilet	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
410	IT	F04A	C03	WC-4B-P	S04A
411	Corridor	F-01A	C01A	W-01	S-01A

Roof level

ROOM	NAME	FLOOR	CEILING	WALL	SKIRTING
412	Corridor	F-01A	C01A	W-01	S-01A
413	MOH Special Area	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
414	Dry Toilet	F-02B	C02	WC-1C-M / W-01W / W-07	S-02B
415	Dirty Utility	F-01A	C03	W-05B	S-01A
416	Vision Test	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
417	Clean Utility / Medication Room	F-01A	C03	W-05B	S-01A
418	Consultation Room	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
419	Audiometry-Spirometry	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
420	Electrocardiogram	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
421	Vital Sign-Phleb	F-01A	C01A	W-01 / WC-2A-L / G-02	S-01A
422	Waiting Area	F-01A	C01A	HC-01 / G-02 / WC-2A-L	S-01A
423	Electricity Room	F04A	C03	WC-4B-P	S04A

Roof level

ROOM	NAME	FLOOR	CEILING	WALL	SKIRTING
424	Female Staff Toilet	F-02D	C02	WC-3A-CE	S-02D
425	Male Staff Toilet	F-02D	C02	WC-3A-CE	S-02D
426	Meeting Room	F05A	C01A	W-01 / HC-01	S05C
427	Director Office	F-05A	C01A	W-01 / HC-01	S-05A
428	Workstations	F-02A	C01A	W-01 / HC-01	S-02A
429	Male Staff Lounge	F-02A	C01A	WC-4A-P	S-02A
430	Female Staff Lounge	F-02A	C01A	WC-4A-P	S-02A
431	Crash Cart Bay	F-01A	C01A	HC-01 / G-02 / WC-2A-L	S-01A
433	Lobby	F-01A	C01A	W-01 / W-01W / W-07	S-01A
434	Crash Cart Bay	F-01A	C01A	HC-01 / G-02 / WC-2A-L	S-01A
436	Reception	F-01A	C01A	HC-01 / G-02 / WC-2A-L	S-01A
437	Lobby	F-01A	C01A	W-01 / W-01W / W-07	S-01A
438	Lobby	F-01A	C01A	W-01 / W-01W / W-07	S-01A